

AD-A139 771


SPECTRAL POWER DENSITY EXTREMA FOR MICROWAVE EMISSION
FROM A RELATIVISTIC REFLEX TRIODE(U) HARRY DIAMOND LABS
ADELPHI MD M J SMITH FEB 84 HDL-TR-2029


1/1

UNCLASSIFIED

F/G 9/1

NL

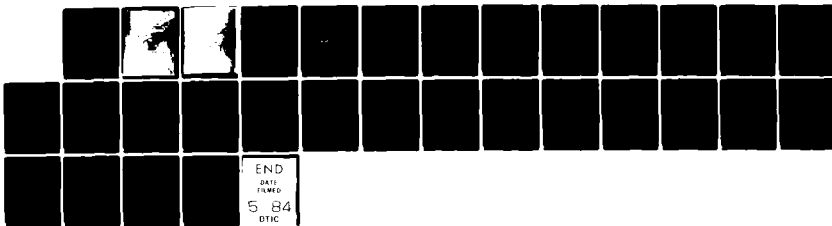



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

AD A139771



UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER HDL-TR-2029	2. GOVT ACCESSION NO. AD-A139771	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) Spectral Power Density Extrema for Microwave Emission from a Relativistic Reflex Triode	5. TYPE OF REPORT & PERIOD COVERED Technical Report	
	6. PERFORMING ORG. REPORT NUMBER	
7. AUTHOR(s) Michael J. Smith	8. CONTRACT OR GRANT NUMBER(s)	
9. PERFORMING ORGANIZATION NAME AND ADDRESS Harry Diamond Laboratories 2800 Powder Mill Road Adelphi, MD 20783	10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS	
11. CONTROLLING OFFICE NAME AND ADDRESS U.S. Army Materiel Development and Readiness Command Alexandria, VA 22333	12. REPORT DATE February 1984	
	13. NUMBER OF PAGES 30	
14. MONITORING AGENCY NAME & ADDRESS (if different from Controlling Office)	15. SECURITY CLASS. (of this report) Unclassified	
	15a. DECLASSIFICATION/DOWNGRADING SCHEDULE	
16. DISTRIBUTION STATEMENT (of this Report) Approved for public release; distribution unlimited.		
17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)		
18. SUPPLEMENTARY NOTES		
19. KEY WORDS (Continue on reverse side if necessary and identify by block number) Microwave power spectral density Relativistic Extrema Triodes Cylindrical electron Diodes Beams		
20. ABSTRACT (Continue on reverse side if necessary and identify by block number) Spectral power density extrema are investigated for variable frequency and fixed beam radius, for variable beam radius and fixed frequency, and for both variable frequency and beam radius in the one-dimensional sheet model of the relativistic reflex triode. Approximate and exact formulations are given. A simple example is presented wherein the power spectrum exhibits gross features of the real situation. The extrema are seen to be closely related to the zeros of Bessel functions of the first kind or to zeros of equations involving both these Bessel functions and the Fourier-transformed current. 4		

DD FORM 1 JAN 73 1473 EDITION OF 1 NOV 65 IS OBSOLETE

1

UNCLASSIFIED

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

BLANK PAGE

CONTENTS

	<u>Page</u>
1. INTRODUCTION	5
2. EXTREMA AT CONSTANT BEAM RADIUS	7
2.1 Asymptotic Forms of Interference Form Factor F^2 and Approximate Location of Minima and Maxima	7
2.2 Exact Location of Maxima and Minima for F^2	10
2.3 Frequencies for Minima and Maxima of F^2 at $R = 2.54$ cm	11
2.4 Other Beam Power Spectra	13
3. EXTREMA AT CONSTANT FREQUENCY	13
3.1 Approximate Representations of Form Factor f^2	13
3.2 Exact Location of Maxima and Minima for Form Factor f^2	15
4. SURFACE EXTREMA	17
5. CONCLUSIONS	18
LITERATURE CITED	19
GLOSSARY OF TERMS	24
DISTRIBUTION	25

APPENDICES

A.--LARGE ARGUMENT ZEROS OF BESSEL FUNCTIONS	21
B.--CONDITION FOR MAXIMA OR MINIMA	23

FIGURES

1. Structure factor $F^2 = 4J_1^2(x)/x^2$ versus its argument $x = \omega R/c$	8
2. Structure factor $F^2 = 4J_1^2(x)/x^2$ versus frequency $f = xc/2\pi R$	12
3. Structure factor $f^2 = 4x^2J_1^2(x)$ versus argument $x = \omega R/c$	14
4. Structure factor $f^2 = 4x^2J_1^2(x)$ versus beam radius $R = cx/\omega$	16

TABLES

1. Small Argument Representation of Form Factor F^2	8
2. Comparison of Approximate Formula with $J_1 = 0$ in Predicting Minima of F^2	9

TABLES (Cont'd)

	<u>Page</u>
3. Actual and Approximate Locations of F^2 Maxima	9
4. Comparison of Exact and Approximate Magnitudes of Successive F^2 Maxima	10
5. Frequencies for Minima and Maxima with Beam Radius = 2.54 cm	12
6. Small Argument Representation of Form Factor f^2	14
7. Actual and Approximate Locations of f^2 Maxima	15
8. Comparison of Exact and Approximate Magnitudes of Successive f^2 Maxima	15

Accession For	
NTIS GRA&I	<input checked="" type="checkbox"/>
DTIC TAB	<input type="checkbox"/>
Unannounced	<input type="checkbox"/>
Justification	
By _____	
Distribution/	
Availability Codes	
Dist	Avail and/or Special
A/1	



1. INTRODUCTION

For high-power microwave emission from relativistic reflex triodes and diodes to be analyzed (for a uniform cylindrical beam of radius R), we must first determine the average power spectral density per steradian radiated perpendicular to the beam. For the relativistic sheet model of the electron dynamics, that density is given by¹

$$d^3P_{\perp}/d\omega d^2\Omega = CR^4\omega^2 |S(\omega)|^2 F^2(\omega R/c) \quad (1)$$

$S(\omega) = \Sigma^*(\omega)$, from Brandt et al.,¹ with $C = \mu_0 \pi \sigma^2 / 4cT$, and

$$S(\omega) = (1/2\pi) \int_{-\infty}^{\infty} dt \exp(i\omega t) S(t) \quad (2)$$

Moreover,

$$S(t) = \sum_{m=1}^{N(t)} v_m(t) \quad (3)$$

and

$$F^2(x) = 4J_1^2(x)/x^2 \quad (4)$$

In these terms, $d^2\Omega$ is the differential solid angle, μ_0 is the permeability of free space, σ is the sheet surface charge density, R is the beam radius, c is the speed of light, T is the voltage pulse duration, ω is the angular frequency, $N(t)$ is the number of sheets in the source region at time t , $v_m(t)$ is the velocity of the m^{th} sheet at time t , and J_1 is the first-order Bessel function of the first kind. Equation (1) was obtained by solving the wave equation with a current distribution represented by the sheet dynamics, including only radiative time delays which are perpendicular to the beam, while using the dipole far-field approximation. $S(t)$ is the sum of the sheet velocities. This introduces the function which is at the heart of the present study. Now let us discuss what is to be done with it and why.

The purpose of this paper is to investigate the extrema of equation (1). By extrema we mean maxima, minima, or inflections in one dimension and, on surfaces, their two-dimensional analogs. Such an understanding is necessary to the optimal design of high-power microwave sources.

It is known that $S(t)$ is a very complicated function of time. $S(t)$ has some general features, however. It is zero for $t < 0$ and for $t > 0$ makes a rapid transition to a regime in which aperiodic oscillations about a mean value occur over a period of time corresponding to many periods of oscillation. Ignoring the superimposed aperiodic fluctuations, a simple, very coarse-grained representation of this behavior would be to set

$$S(t) = N_a v_a H(t) \quad (5)$$

¹Howard E. Brandt, Alan Bromborsky, Henry B. Bruns, H. Allen Kehs, and George P. Lasche, Gigawatt Microwave Emission from a Relativistic Reflex Triode, Harry Diamond Laboratories, HDL-TR-1917 (August 1980).

where N_a is the mean number of sheets, v_a is the mean velocity, and $H(t)$ is the Heaviside step function given by equation (6) below. From equation (2) one finds $S(\omega) = S/\omega$ with $S = iN_a v_a / 2\pi$, and we are using ω as shorthand for $\omega + i\delta$ with $\delta \rightarrow 0^+$:

$$H(t) = \begin{cases} 0 & t < 0 \\ 1 & t > 0 \end{cases} . \quad (6)$$

Inserting the Fourier transform of equation (5) into equation (1) gives ($K = S^2 C$):

$$d^3 P_1 / d\omega d^2 \Omega = K R^4 F^2(\omega R/c) . \quad (7)$$

We observe that in this naive representation the ω dependence appears entirely in F^2 . One of the principal problems just mentioned involves maximizing equation (7) with respect to ω for some given R . We see that this amounts to finding extrema for F^2 alone given the very simple $S(\omega)$ corresponding to equation (5). In the first part of section 2 we consider the extrema of $F^2(x)$ with $x = \omega R/c$ and show that minima and maxima occur at the zeros of J_1 and J_2 , respectively. Simple asymptotic expressions for F^2 , J_1 , and J_2 are given for small and large arguments. Where $S(\omega)$ cannot be considered to be of the form corresponding to equation (5), we must instead seek the extrema of $|S(\omega)|^2 J_1^2(\omega R/c)$ at constant R . This problem is the subject of section 2.4. In section 3, we turn our attention to the variation of equation (1) with R at constant ω . In particular, we seek extrema of a function

$$f^2 = x^4 F^2(x) = 4x^2 J_1^2(x) , \quad (8)$$

with $x = \omega R/c$ as before. This function has minima at $J_1 = 0$ and maxima where $J_0 = 0$. Asymptotic forms are presented for f^2 , J_0 , and J_1 for small and large arguments. In section 4, we consider the surface given by

$$h^2 = R^2 |S(\omega)|^2 J_1^2(\omega R/c) , \quad (9)$$

and seek extrema with respect to ω and R . Inspection of equation (9) reveals that absolute minima should occur where $S(\omega)$ or J_1 vanishes. The former condition defines a set of planes of constant ω , and the latter a set of hyperbolas along which ωR is constant. The maxima are found by solving two simultaneous algebraic equations for ω and R . Clearly, a knowledge of $S(\omega)$ is required for a complete solution.

In the work that follows, the available literature on Bessel functions has been used extensively. The theory of Bessel functions is well summarized in texts by Arfken² and Hildebrand.³ Greater theoretical detail is supplied by

²G. Arfken, *Mathematical Methods for Physicists*, New York, Academic Press (1968).

³F. Hildebrand, *Advanced Calculus for Applications*, Prentice-Hall: Englewood Cliffs, NJ (1962).

Watson.⁴ Frequent use has also been made of formulae summaries to be found in mathematical compendia edited by Gradshteyn and Ryzhik⁵ and by Abramowitz and Stegun.⁶ Also found useful was the short table of Bessel functions, J_n , of order 0, 1, and 2 for values of the arguments $0 \leq x \leq 17.5$ in steps of 0.1 (Stegun). For more accurate work, a reference of the Harvard University Computation Laboratory has been very useful: Tables of Bessel Functions of the First Kind,⁷ for $0 \leq x \leq 100$ with incremental steps of 0.001 up to $x = 25$ and 0.01 thereafter. Lastly, Boas⁸ clearly describes the process of determining extrema for unbounded surfaces as well as for those that are bounded. The latter case would occur if there were lower or upper bounds of a practical nature on ω and R .

2. EXTREMA AT CONSTANT BEAM RADIUS

2.1 Asymptotic Forms of Interference Form Factor F^2 and Approximate Location of Minima and Maxima

Figure 1 illustrates the behavior of F^2 for $0 \leq x \leq 7$, where F^2 is given by equation (4). Its value at $x = 0$ is precisely 1. The first two zeros of the function occur at 3.83 and 7.02, $J_1(x)$ being zero here. In fact, $J_1 = 0$ for $x \neq 0$ locates all the minima of the function. Indeed, one might expect as much by inspection of equation (4). The graph indicates two successive maxima. The first, at $x = 0$, is much larger than the second, which occurs at $x = 5.14$. This secondary peak has a value of 1.75×10^{-2} . We will show that these peaks fall off as x^{-3} for large x and, moreover, are located at the zeros of J_2 .

J_1 may be represented by a few terms of the series ($n = 1$):

$$J_n(x) = (x/2)^n \sum_{s=0}^{\infty} \frac{(-1)^s}{s!(s+n)!} (x/2)^{2s}, \quad (10)$$

for small arguments. Using this we find that F^2 is given by

$$F^2 = 1 - x^2/4 + 5x^4/192 - 7x^6/4608 + \dots \quad (11)$$

⁴G. N. Watson, *A Treatise on the Theory of Bessel Functions*, 2nd ed., Cambridge, England, The University Press; New York, The MacMillan Company (1944).

⁵I. Gradshteyn and I. Ryzhik, *Table of Integrals, Series, and Products*, 4th ed., A. Jeffrey, ed., New York, Academic Press (1980).

⁶M. Abramowitz and I. Stegun, eds., *Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables*, Washington, D. C., U. S. Government Printing Office (1964).

⁷Harvard University Computation Laboratory, *Tables of the Bessel Functions of the First Kind of Orders*, Cambridge, Harvard University Press (1947-51).

⁸M. Boas, *Mathematical Methods in the Physical Sciences*, New York, Wiley (1966).

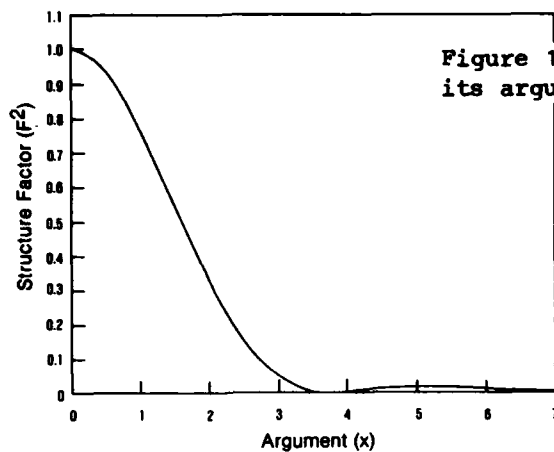


Figure 1. Structure factor $F^2 = 4J_1^2(x)/x^2$ versus its argument $x = \omega R/c$.

The first four terms adequately represent F^2 up to $x = 1.6$ (less than 1 percent error) as shown in table 1. The large argument approximation for J_n is

$$J_n = (2/\pi x)^{1/2} \cos(x - n\pi/2 - \pi/4) . \quad (12)$$

For $n = 1$,

$$J_1 = (2/\pi x)^{1/2} \sin(x - \pi/4) . \quad (13)$$

Making use of this, one finds for F^2 ,

$$F^2 = 4(1 - \sin 2x)/\pi x^3 . \quad (14)$$

TABLE 1. SMALL ARGUMENT REPRESENTATION OF FORM FACTOR F^2

x	$F^2(\text{series})$	$F^2(\text{exact})$	Deviation (%)
0.0	1.	1.	--
0.2	0.9900	0.9900	--
0.4	0.9607	0.9607	--
0.6	0.9133	0.9133	--
0.8	0.8503	0.8503	--
1.0	0.7745	0.7746	0.01
1.2	0.6895	0.6897	0.03
1.4	0.5986	0.5994	0.13
1.6	0.5052	0.5075	0.45
1.8	0.4117	0.4175	1.39
2.0	0.3194	0.3326	3.97

This expression shows that the successive maxima of F^2 for large x fall off rapidly as x^{-3} . Equation (14) may be used to determine the large argument locations of zeros (minima) as well as maxima of F^2 . The minima occur for $\sin 2x = +1$, requiring

$$x_n = \pi(n + 1/4) . \quad (15)$$

Zeros as predicted by equation (15) are compared with the actual values as determined by $J_1 = 0$ and n or $x \neq 0$, in table 2. Results are more than adequate for $n \geq 2$. Appendix A shows that Bessel functions of odd order, J_1 , J_3 , etc., have zeros which obey equation (15) for large x .

The maxima of F^2 occur where $\sin 2x = -1$. Here

$$x_n = \pi(n + 3/4) . \quad (16)$$

TABLE 2. COMPARISON OF APPROXIMATE FORMULA WITH $J_1 = 0$ IN PREDICTING MINIMA OF F^2 (MINIMA ARE PREDICTED FOR $N \geq 1$)

n	Actual zero	Approximate zero	Deviation (%)
0	0	0.79	--
1	3.83	3.93	2.54
2	7.02	7.07	0.71
3	10.17	10.21	0.39
4	13.32	13.35	0.22
5	16.47	16.49	0.12
6	19.62	19.63	0.05
7	22.76	22.78	0.09
8	25.90	25.92	0.08
9	29.05	29.06	0.03
10	32.19	32.20	0.03

We compare the maxima locations as predicted by equation (16) with values given by setting $J_2 = 0$, $x \neq 0$ in table 3. There is good agreement (percentage of deviation less than 1 percent) for $n > 3$. We show in appendix A that Bessel functions of even order, J_0 , J_2 , etc., have zeros which obey equation (16) for large x .

TABLE 3. ACTUAL AND APPROXIMATE LOCATIONS OF F^2 MAXIMA

n	Actual location ($J_2 = 0$)	Approximate location	Deviation (%)
0	0	2.36	--
1	5.14	5.50	7.0
2	8.42	8.64	2.6
3	11.62	11.78	1.4
4	14.80	14.92	0.8
5	17.96	18.06	0.6
6	21.12	21.21	0.4
7	24.27	24.35	0.3
8	27.42	27.49	0.3
9	30.57	30.63	0.2
10	33.72	33.77	0.1

Inspection of equation (14) reveals that the magnitude of F^2 maxima for large x_n is given by

$$F^2 = 8/\pi x_n^3 \quad (17)$$

Equation (17) is compared with equation (4) in table 4.

TABLE 4. COMPARISON OF EXACT AND APPROXIMATE MAGNITUDES OF SUCCESSIVE F^2 MAXIMA

n	$x_n(J_2 = 0)$	$4J_1^2/x^2$	$8/\pi x^3$	Deviation (%)
0	0	1	∞	∞
1	5.136	0.017498	0.018796	7.42
2	8.417	0.004158	0.004270	2.69
3	11.620	0.001601	0.001623	1.37
4	14.796	0.000779	0.000786	0.90
5	17.960	0.000437	0.000440	0.69
6	21.117	0.000269	0.000270	0.37
7	24.270	0.000178	0.000178	--
8	27.420	0.000123	0.000124	--
9	30.570	0.000089	0.000089	--

2.2 Exact Location of Maxima and Minima for F^2

In determining maxima and minima, it will be helpful to use the recurrence relations

$$J_{n-1} = nJ_n/x + J_n' \quad (18)$$

and

$$J_{n+1} = nJ_n/x - J_n' \quad (19)$$

Taking the first derivative of F^2 and setting the result to zero, we get

$$dF^2/dx = 8J_1(xJ_1' - J_1)/x^3 = 0 \quad .$$

From equation (19) with $n = 1$, we have

$$xJ_1' - J_1 = -xJ_2 \quad .$$

Thus,

$$dF^2/dx = -8J_1J_2/x^2 = 0 \quad (20)$$

is a condition for relative extrema.

The second derivative of F^2 is

$$d^2F^2/dx^2 = 16x^{-3}J_1J_2 - 8x^{-2}(J_1'J_2 + J_1J_2') \quad (21)$$

Inspection of equation (20) reveals that it is satisfied for J_1 or $J_2 = 0$, provided $x \neq 0$. At $x = 0$, J_1 and J_2 , as well as x , simultaneously go to zero. We will investigate this situation last. Let us first note that if $x \neq 0$, J_1 and J_2 do not have zeros in common. Setting $J_1 = 0$, but J_2 and $x \neq 0$ satisfies equation (20). In equation (21), we have

$$d^2F^2/dx^2 = -8J_1'J_2/x^2 .$$

Setting $n = 1$ in equation (19), and noting that $J_1 = 0$, we have $J_1' = -J_2$, so

$$d^2F^2/dx^2 = 8x^{-2}J_2^2 > 0 ,$$

and there are minima here ($J_1 = 0$). On the other hand, setting $J_2 = 0$,

$$d^2F^2/dx^2 = -8x^{-2}J_1J_2' .$$

Now put $n = 2$ in equation (18), obtaining $J_2' = J_1$ with $J_2 = 0$. Thus, here

$$d^2F^2/dx^2 = -8x^{-2}J_1^2 < 0 ,$$

and we have maxima at these x . Finally, making use of equation (11), we find

$$dF^2/dx = -x/2 + O(x^3) ,$$

which goes to zero as $x \rightarrow 0$, indicating a maximum or minimum here. Going further,

$$d^2F^2/dx^2 = -1/2 + O(x^2) ,$$

so that at $x = 0$

$$d^2F^2/dx^2 = -1/2 < 0 ,$$

indicating a maximum. At this point $F^2 = 1$, as indicated by equation (11).

Summarizing, we have maxima at the zeros of J_2 (now including $x = 0$) and minima at the zeros of J_1 with $x \neq 0$.

2.3 Frequencies for Minima and Maxima of F^2 at $R = 2.54$ cm

In general, the frequencies, f_n , at which maxima of F^2 occur if R is held constant are given by

$$f_n = cx_n/2\pi R , \quad (22)$$

where x_n is a zero of J_2 . The largest value of F^2 occurs at $x_0 = 0$. The successive maxima of F^2 are given exactly by equation (17) and fall off as x_n^{-3} for sufficiently large x_n . For large x_n we have the approximate relations

$$f_n = c(n + 3/4)/2R , \quad (23)$$

and

$$F^2 = 8/\pi^4 (n + 3/4)^3 \quad (24)$$

following from equations (16), (17), and (22).

The f values, where $F^2 = 0$, are also given by equation (22), but now the x_n are zeros of $J_1(x)$ for $x \neq 0$. For large enough x ,

$$f_n = c(n + 1/4)/2R \quad (25)$$

We summarize exact values of f_n at minima and maxima in table 5 for $R = 2.54$ cm ($c/2R = 5.9$ GHz). Exact values of F^2 for the maxima will be found in table 4. The first two cycles of F^2 plotted versus frequency are presented in figure 2.

TABLE 5. FREQUENCIES (IN GHz) FOR MINIMA AND MAXIMA WITH BEAM RADIUS = 2.54 cm

n	Minima		Maxima	
	Exact	Approximate	Exact	Approximate
0	--	1.48	0	4.43
1	7.19	7.38	9.65	10.33
2	13.18	13.28	15.81	16.23
3	19.10	19.18	21.82	22.13
4	25.02	25.08	27.79	28.03
5	30.93	30.98	33.73	33.93
6	36.85	36.88	39.66	39.83
7	42.74	42.78	45.58	45.73
8	48.64	48.68	51.50	51.63
9	54.56	54.58	57.41	57.53

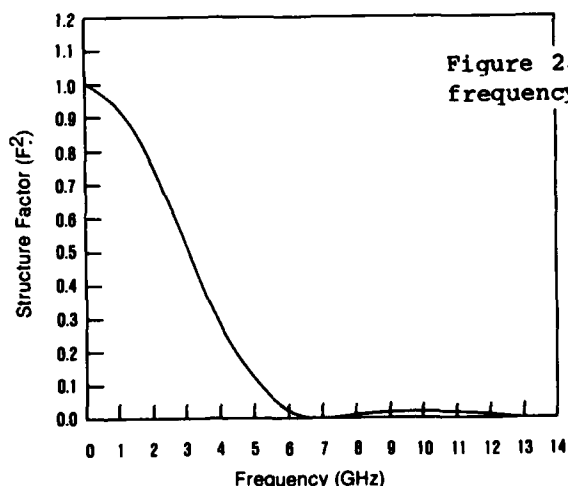


Figure 2. Structure factor $F^2 = 4J_1^2(x)/x^2$ versus frequency $f = xc/2\pi R$.

2.4 Other Beam Power Spectra

If $S(\omega) \neq S/\omega$, the appropriate factor in equation (1) to subject to extremization is

$$g^2 = |S(\omega)|^2 J_1^2(\omega R/c) . \quad (26)$$

By inspection of equation (26) we expect absolute minima to occur where either $|S(\omega)|$ or $J_1(\omega R/c) = 0$. These conditions yield specific planes beginning with $\omega = 0$ which are perpendicular to the ω axis and cut the surface prescribed by equation (1). Taking the first derivative of g^2 and setting it equal to zero gives

$$dg^2/d\omega = 2|S(\omega)|J_1[J_1|S(\omega)|]' + R|S(\omega)|J_1'/c = 0 , \quad (27)$$

where $|S(\omega)|'$ and J_1' denote derivatives of $|S(\omega)|$ or J_1 with respect to their arguments. The factor in parentheses yields extrema of equation (26) other than absolute minima (i.e., extrema where g^2 is nonzero). Among these may be maxima of varying height which include one or more absolute maxima, other minima (located between the peaks) which give nonzero g^2 , as well as points of inflection. These cases are sorted out by taking the second derivative. Making use of equation (19) we have

$$J_1' = cJ_1/\omega R - J_2 .$$

On substituting the above expression in equation (27), we get as the condition for extrema (barring absolute minima)

$$\left[|S(\omega)|' + \omega^{-1}|S(\omega)| \right] J_1 - R|S(\omega)|J_2/c = 0 . \quad (28)$$

Note that equation (28) reduces to the earlier condition for maxima, namely, $J_2 = 0$, if $|S(\omega)|' = S/\omega$. The test for maxima is given in appendix B, where it is shown that the behavior of $|S(\omega)|'/S(\omega)$ is the determining factor.

3. EXTREMA AT CONSTANT FREQUENCY

3.1 Approximate Representations of Form Factor f^2

Figure 3 illustrates the behavior of f^2 (eq (8)) for $0 \leq x \leq 7$. It has two peaks in the interval. These are located at 2.41 and 5.52, J_0 being zero at these points. $J_0 = 0$ also locates all the other maxima of this function. Also, as one might expect, $J_1 = 0$ locates all the minima. Three of these zeros are seen on the graph. They lie at x values of 0, 3.83, and 7.02.

The maxima are seen to grow with x . The first maximum has a magnitude of 6.23; the second, 14.11. Successive maxima which are off the graph are larger still. We will show shortly that this growth is proportional to x .

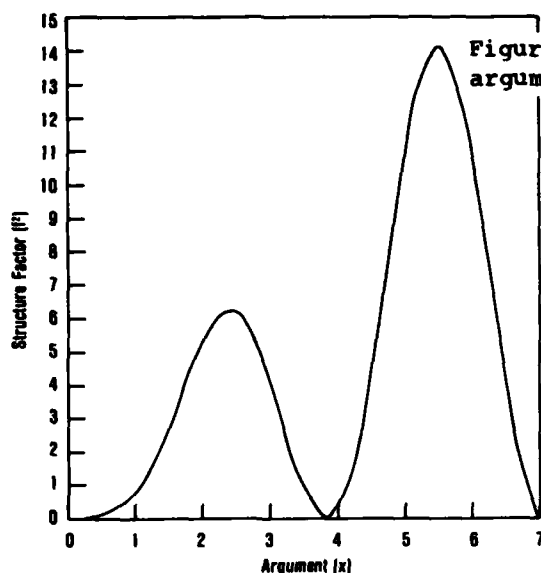


Figure 3. Structure factor $f^2 = 4x^2 J_1^2(x)$ versus argument $x = \omega R/c$.

From equations (8) and (11), we immediately determine a useful series which represents f^2 for small arguments:

$$f^2 = x^4 - x^6/4 + 5x^8/192 - 7x^{10}/4608 + \dots \quad (29)$$

One obtains reasonable values (less than 1 percent error) up to $x = 1.6$ using only the first four terms given above. This is illustrated in table 6.

TABLE 6. SMALL ARGUMENT REPRESENTATION OF FORM FACTOR f^2

x	$f^2(\text{series})$	$f^2(\text{exact})$	Deviation (%)
0	0	0	--
0.2	0.0016	0.0016	--
0.4	0.0246	0.0246	--
0.6	0.1184	0.1184	--
0.8	0.3483	0.3483	--
1.0	0.7745	0.7746	0.01
1.2	1.4291	1.4302	0.03
1.4	2.2496	2.3027	0.13
1.6	3.3108	3.3258	0.45
1.8	4.3219	4.3826	1.39
2.0	5.1111	5.3218	3.96

Substituting the large argument approximation for J_1 (eq (13) in eq (8)) one finds

$$f^2 = (4x/\pi)(1 - \sin 2x) \quad (30)$$

The location of minima and maxima are again given by equations (15) and (16), respectively. Table 2 gives locations of the absolute minima, including n or $x = 0$ where J_1 is zero. Table 7 gives maxima locations for f^2 . Agreement with the approximate formula and exact locations as given by $J_0(x) = 0$ is very good.

TABLE 7. ACTUAL AND APPROXIMATE LOCATIONS OF f^2 MAXIMA

n	Actual location ($J_0 = 0$)	Approximate location	Deviation (%)
0	2.41	2.36	2.07
1	5.52	5.50	0.36
2	8.65	8.64	0.12
3	11.79	11.78	0.08
4	14.93	14.92	0.07
5	18.07	18.06	0.06
6	21.21	21.21	--
7	24.35	24.35	--
8	27.49	27.49	--
9	30.63	30.63	--
10	33.78	33.77	--

Inspection of equation (30) shows that the growth of maxima for f^2 is given approximately by the linear relation

$$f_n^2 = 8x_n/\pi \quad (31)$$

Equation (31) is compared with equation (8) in table 8. Table 8 also gives local R values for maxima. There are practical limitations on the largeness of R. Figure 4 gives the first three cycles of f^2 versus R for 35 GHz.

TABLE 8. COMPARISON OF EXACT AND APPROXIMATE MAGNITUDES OF SUCCESSIVE f^2 MAXIMA

n	$x(J_0 = 0)$	R (cm)	$4x^2 J_1^2$	$8x/\pi$	Deviation (%)
0	2.405	0.33	6.23	6.12	1.77
1	5.520	0.75	14.11	14.06	0.35
2	8.654	1.18	22.07	22.04	0.14
3	11.792	1.61	30.05	30.03	0.07
4	14.931	2.04	38.04	38.02	0.05
5	18.071	2.47	46.04	46.02	--
6	21.212	2.89	54.03	54.02	--
7	24.352	3.32	62.03	62.01	--
8	27.49	3.75	70.02	70.00	--
9	30.63	4.18	78.02	78.00	--

3.2 Exact Location of Maxima and Minima for Form Factor f^2

This section gives the analytical method for determining exact maxima and minima for this case. The condition for extrema is

$$df^2/dx = 8xJ_1(J_1 + xJ_1') = 0 \quad (32)$$

From equation (18),

$$xJ_0 = J_1 + xJ_1' .$$

Therefore,

$$df^2/dx = 8x^2J_0J_1 = 0 . \quad (33)$$

Thus, extrema occur where J_0 or J_1 is zero. Continuing,

$$d^2f^2/dx^2 = 16xJ_0J_1 + 8x^2(J_0'J_1 + J_0J_1') . \quad (34)$$

When $J_1 = 0$,

$$d^2f^2/dx^2 = 8x^2J_0J_1' . \quad (35)$$

From equation (18) with $J_1 = 0$, we have $J_1' = J_0$, so

$$d^2f^2/dx^2 = 8x^2J_0^2 > 0, \quad (36)$$

and there are minima here. On the other hand, when $J_0 = 0$,

$$d^2f^2/dx^2 = 8x^2J_0'J_1 , \quad (37)$$

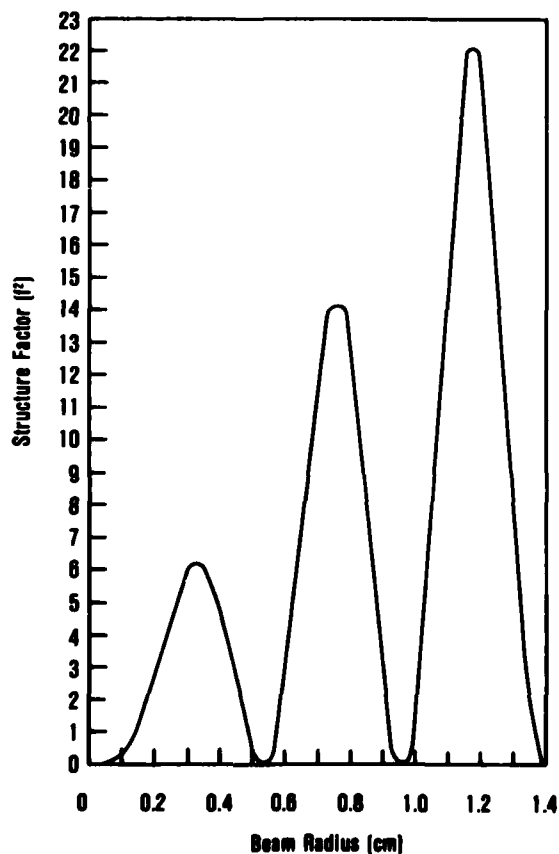


Figure 4. Structure factor $f^2 = 4x^2J_1^2(x)$ versus beam radius $R = cx/\omega$.

but $J'_0 = -J_1$ by equation (19) and

$$d^2f^2/dx^2 = -8x^2J_1^2 < 0 . \quad (38)$$

This designates the location of maxima.

4. SURFACE EXTREMA

To determine surface extrema, we start with equation (9). Taking partial derivatives with respect to R yields

$$\partial h^2/\partial R = 2R|S(\omega)|^2 J_1(J_1 + \omega R J'_1/c) = 0 . \quad (39)$$

Here J'_1 denotes differentiation with respect to the argument. Making use of equation (18), we have

$$\partial h^2/\partial R = 2\omega R^2 J_1 |S(\omega)|^2 J_0/c = 0 . \quad (40)$$

On the other hand, the partial derivative with respect to ω gives

$$\partial h^2/\partial \omega = 2R^2 |S(\omega)| J_1 (J_1 d|S(\omega)|/d\omega + R |S(\omega)| J'_1/c) = 0 . \quad (41)$$

With the help of equation (19) this is rendered in the form

$$\partial h^2/\partial \omega = 2R^2 |S(\omega)| J_1 \{ (d|S(\omega)|/d\omega + |S(\omega)|/\omega) J_1 - R |S(\omega)| J_2/c \} = 0 . \quad (42)$$

The bracketed term is identical to equation (28). As expected, absolute minima occur where $|S(\omega)|$ or $J_1 = 0$. The former condition gives planes of constant ω , and the latter yields a family of hyperbolas of constant ωR . Minima also occur where ω or R is zero. Inspection of equations (40) and (42) reveals that other extrema (not including the absolute minima) occur if we satisfy

$$J_0 = 0 , \quad (43)$$

and

$$(d|S(\omega)|/d\omega + |S(\omega)|/\omega) J_1 - R |S(\omega)| J_2/c = 0 \quad (44)$$

simultaneously. Let the zeros of J_0 be denoted now by x_{n0} . They are given in table 8. Then

$$R = cx_{n0}/\omega \quad (45)$$

replaces R in equation (44). Do not forget the arguments of J_1 and J_2 ! Thus, $J_{1n} = J_1(x_{n0})$ and $J_{2n} = J_2(x_{n0})$ are now independent of ω and R . Equation (44) reduces to

$$(d|S(\omega)|d\omega + |S(\omega)|/\omega)J_{1n} - x_{n0}|S(\omega)|J_{2n}/\omega = 0. \quad (46)$$

The solution depends on the form of $|S(\omega)|$. Consider our earlier example. If $|S(\omega)| = S/\omega$, equation (46) reduces to

$$J_{2n} = 0. \quad (47)$$

This condition can only be met approximately for large x where the zeros of J_0 and J_2 converge. Here the extrema, including any absolute maxima, occur along hyperbolas of constant ωR .

5. CONCLUSIONS

The problem of extremizing the average power spectral density per steradian may be approached from three points of view. If the operating frequency is fixed by practical considerations (i.e., the atmospheric window for microwave emission at 35 GHz), we seek to vary R at constant ω . If R and voltage are fixed by certain design considerations, but ω is not, we seek extrema with varying ω . When both variables are unrestricted, we must seek extrema over the entire surface.

The ω dependence of the Fourier transform of the sum over sheet velocities plays an important role in the determination of extrema if ω is not fixed. The only exceptions to this are the absolute minima given by the zeros of J_1 . The average power radiated is zero here. If $|S(\omega)|$ is of the form S/ω with S some positive constant, maxima are located at the zeros of J_2 . The maxima are then seen to fall off as ω^{-3} for large ω . This is in addition to the absolute minima associated with J_1 as discussed above. For general $|S(\omega)|$, additional absolute minima occur where $|S(\omega)| = 0$, the average power radiated being zero here.

If ω is fixed and R varied, one finds the absolute minima to be again associated with J_1 as expected. These minima are now located at the intersection of the surface, the plane of constant ω , and planes of constant R . Maxima, however, are now associated with the zeros of J_0 . This yields another set of planes of constant R associated with the maxima. The growth of these maxima is proportional to R for large R .

Allowing both ω and R to vary freely leads to a set of two algebraic equations which must be solved simultaneously for ω and R . Again, $|S(\omega)|$ and $J_1 = 0$ are associated with absolute minima. The zeros, if any, of $|S(\omega)|$ are planes of constant ω . On the other hand, $J_1 = 0$ now implies a set of hyperbolas (actually sheets bent in this form) with ωR constant. Their intersection with the surface locates these absolute minima. As the argument of J_1 is $\omega R/c$, the planes ω or $R = 0$ are also associated with absolute minima. Other extrema including absolute maxima are determined by solving simultaneously two algebraic equations for the points (ω, R) at which the extrema are located. For the special case $|S(\omega)| = \omega^{-1}S$, the points trend to

a set of hyperbolas which are the simultaneous solutions of $J_0 = J_2 = 0$ (valid only for large arguments). For other $|S(\omega)|$, the results can be more complicated. The importance of $S(\omega)$ in determining the location of maxima suggests the need to develop more realistic expressions for theoretical use of computer data.

~~~~~

#### LITERATURE CITED

- (1) Howard E. Brandt, Alan Bromborsky, Henry B. Bruns, H. Allen Kehs, and George P. Lasche, Gigawatt Microwave Emission from a Relativistic Reflex Triode, Harry Diamond Laboratories, HDL-TR-1917 (August 1980).
- (2) G. Arfken, Mathematical Methods for Physicists, New York, Academic Press (1968).
- (3) F. Hildebrand, Advanced Calculus for Applications, Prentice-Hall: Englewood Cliffs, NJ (1962).
- (4) G. N. Watson, A Treatise on the Theory of Bessel Functions, 2nd ed., Cambridge, England, The University Press: New York, The MacMillan Company (1944).
- (5) I. Gradshteyn and I. Ryzhik, Table of Integrals, Series, and Products, 4th ed., A. Jeffrey, ed., New York, Academic Press (1980).
- (6) M. Abramowitz and I. Stegun, eds., Handbook of Mathematical Functions with Formulas, Graphs, and Mathematical Tables, Washington, D. C., U. S. Government Printing Office (1964).
- (7) Harvard University Computation Laboratory, Tables of the Bessel Functions of the First Kind of Orders, Cambridge, Harvard University Press (1947-51).
- (8) M. Boas, Mathematical Methods in the Physical Sciences, New York, Wiley (1966).

# APPENDIX A.--LARGE ARGUMENT ZEROS OF BESSEL FUNCTIONS

Equation (12) in the body of the report gives the general expression for  $J_n(x)$  for large  $x$ . For  $n = 2s$ , we have on substitution

$$\begin{aligned} J_{2s} &= (2/\pi x)^{1/2} \cos([x - \pi/4] - s\pi) \\ &= (-1)^s (2/\pi x)^{1/2} \cos(x - \pi/4) . \end{aligned}$$

The argument of the cosine factor is the same for all the  $J_{2s}$ . It alone determines the zeros which occur for

$$x = \pi(n + 3/4) . \quad (A-1)$$

On the other hand, for odd  $n = 2s + 1$ ,

$$\begin{aligned} J_{2s+1} &= (2/\pi x)^{1/2} \cos([x - \pi/4] - 1/2(2s + 1)\pi) \\ &= (-1)^s (2/\pi x)^{1/2} \sin(x - \pi/4) . \end{aligned}$$

Therefore, the zeros of the  $J_{2s+1}$  which depend on the argument of the sine alone occur at

$$x = \pi(n + 1/4) . \quad (A-2)$$

The foregoing remarks apply to sufficiently large arguments of the  $J_n$ .



# APPENDIX B.--CONDITION FOR MAXIMA OR MINIMA

As  $J_1$  and  $|S(\omega)|$  in equation (19)  $\neq 0$ , except for absolute minima, we may write when away from these points

$$dg^2/d\omega = 2g^2 \left( d \ln |S(\omega)| / d\omega + \omega^{-1} - RJ_2/cJ_1 \right) = 0, \quad (B-1)$$

and we explore the region where the last factor on the right vanishes. Taking the second derivative we have

$$d^2g^2/d\omega^2 = 2g^2 \left( d \ln |S(\omega)| / d\omega + \omega^{-1} - RJ_2/cJ_1 \right)' . \quad (B-2)$$

The prime on the last factor denotes differentiation with respect to  $\omega$ . As  $2g^2 > 0$ , whether we have minima or maxima here depends on the last factor of equation (2) in the body of the report. Taking the indicated derivative, we have

$$g^{-2} d^2g^2 / 2d\omega^2 = |S(\omega)|'' / |S(\omega)| - \left( |S(\omega)|' / |S(\omega)| \right)^2 - \omega^{-2} - (R/c)^2 (J_2' J_1 - J_2 J_1') / J_1^2 . \quad (B-3)$$

We now make use of certain relations to simplify equation (B-3). From the vanishing of equation (B-1),

$$|S(\omega)|' / |S(\omega)| = -\omega^{-1} + RJ_2/cJ_1 . \quad (B-4)$$

Also, we have the recurrence relations from equations (18) and (19):

$$J_2' = -x^{-1} J_2 + J_1 \quad (B-5)$$

and

$$J_1' = x^{-1} J_1 - J_2 . \quad (B-6)$$

On substitution of equations (B-4) through (B-6), equation (B-3) becomes

$$g^{-2} d^2g^2 / 2d\omega^2 = |S(\omega)|'' / |S(\omega)| - 2\omega^{-2} (1 - xJ_2/J_1)^2 - (R/c)^2 . \quad (B-7)$$

This is as far as we can go without a specific form of  $|S(\omega)|$ . Note that the last two terms are negative. Extrema are therefore guaranteed if

$$|S(\omega)|'' / |S(\omega)| < 2\omega^{-2} (1 - xJ_2/J_1)^2 + (R/c)^2 . \quad (B-8)$$

# GLOSSARY OF TERMS

- c speed of light
- d distance between grid and ground plate
- f quantity defined by equation (8)
- g quantity defined by equation (26)
- h quantity defined by equation (9)
- i  $\sqrt{-1}$
- m summation index introduced in equation (3)
- n denotes order of Bessel function
- s summation index in equation (10)
- v sheet velocity ( $v_m$ ) or average sheet velocity ( $v_a$ )
- x  $\omega R/c$
  
- C constant in equation (1)
- F form factor
- H Heaviside step function
- J Bessel function of first kind ( $n^{\text{th}}$  order denoted by  $J_n$ )
- K constant in equation (7)
- N upper limit on sum (equation (3)) expressed as a function of time or mean number of sheets when subscripted by a
- O designates "order of"
- P power or point ( $\omega$ , R)
- R beam radius
- S sum of sheet velocities,  $S(t)$ , or a constant
  
- $\delta$  infinitesimally small quantity
- $\mu_0$  permeability of free space
- $\omega$  angular frequency
- $\Omega$  solid angle
- $\pi$  pi
- $\sigma$  sheet surface charge density

DISTRIBUTION

ADMINISTRATOR  
DEFENSE TECHNICAL INFORMATION CENTER  
ATTN DTIC-DDA (12 COPIES)  
CAMERON STATION, BLDG 5  
ALEXANDRIA, VA 22314

COMMANDER  
US ARMY MATERIEL DEVELOPMENT  
& READINESS COMMAND  
5001 EISENHOWER AVE  
ALEXANDRIA, VA 22333

DIRECTOR  
DEFENSE ADVANCED RESEARCH  
PROJECTS AGENCY  
ATTN R. GULLICKSON  
ATTN L. C. MARQUET  
ATTN R. SEPUCHA  
1400 WILSON BLVD  
ARLINGTON, VA 22209

DIRECTOR  
DEFENSE COMMUNICATIONS AGENCY  
WASHINGTON, DC 20305

DIRECTOR  
DEFENSE INTELLIGENCE AGENCY  
ATTN D. SPOHN  
ATTN DT-1, NUCL & AP SCI DIV  
ATTN ELECTRONIC WARFARE BRANCH  
WASHINGTON, DC 20301

DIRECTOR  
DEFENSE NUCLEAR AGENCY  
ATTN DEPUTY DIRECTOR  
SCIENTIFIC TECHNOLOGY  
ATTN G. BAKER  
ATTN RAEV, ELECTRONIC VULNERABILITY  
ATTN J. Z. FARBER  
ATTN G. K. SOPER  
ATTN D. STONE  
ATTN V. VAN LINT  
WASHINGTON, DC 20305

UNDER SECRETARY OF DEFENSE  
FOR RESEARCH & ENGINEERING  
ATTN DEPUTY UNDER SECRETARY  
(RESEARCH & ADVANCED TECH)  
ATTN D. L. LAMBERSON  
WASHINGTON, DC 20301

OFFICE OF THE UNDER SECRETARY OF  
DEFENSE FOR RESEARCH & ENGINEERING  
DIR ENERGY TECHNOLOGY OFFICE  
THE PENTAGON  
WASHINGTON, DC 20301

COMMANDER  
US ARMY ABERDEEN PROVING GROUND  
ATTN STEAP-TL, TECH LIB  
ABERDEEN PROVING GROUND, MD 21005

COMMANDER  
BALLISTIC MISSILE DEFENSE  
ADVANCED TECHNOLOGY CENTER  
ATTN D. SCHNEK  
PO BOX 1500  
HUNTSVILLE, AL 35807

DIRECTOR  
US ARMY BALLISTIC RESEARCH LABORATORY  
ATTN DRDAR-TSB-S (STINFO)  
ATTN D. ECCLESHALL  
ATTN C. HOLLANDSWORTH  
ATTN R. KREMENS  
ABERDEEN PROVING GROUND, MD 21005

US ARMY ELECTRONICS TECHNOLOGY  
& DEVICES LABORATORY  
ATTN DELET-DD  
ATTN N. WILSON  
FT MONMOUTH, NJ 07703

US ARMY ERADCOM  
ATTN C. M. DESANTIS  
FT MONMOUTH, NJ 07703

COMMANDER  
US ARMY FOREIGN SCI & TECH CENTER  
FEDERAL OFFICE BUILDING  
ATTN DRXST-SD, SCIENCES DIV  
ATTN T. CALDWELL  
220 7TH STREET, NE  
CHARLOTTESVILLE, VA 22901

DIRECTOR  
US ARMY MATERIEL SYSTEMS  
ANALYSIS ACTIVITY  
ATTN DRXSY-MP  
ABERDEEN PROVING GROUND, MD 21005

COMMANDER  
US ARMY MATLS & MECH RES CENTER  
ATTN DRXMR-H, BALLISTIC MISSILE  
DEF MATERIALS PROG OFFICE  
WATERTOWN, MD 02172

COMMANDER  
US ARMY MISSILE COMMAND  
ATTN DRDMI-TR, PHS SCI DIR  
REDSTONE ARSENAL, AL 35809

COMMANDER  
US ARMY MISSILE & MUNITIONS CENTER  
& SCHOOL  
ATTN ATSK-CTD-F  
REDSTONE ARSENAL, AL 35809

DISTRIBUTION (Cont'd)

OFFICE OF THE DEPUTY CHIEF OF STAFF  
FOR OPERATIONS & PLANS  
DEPARTMENT OF THE ARMY  
ATTN DAMO-SSN, NUCLEAR DIVISION  
WASHINGTON, DC 20310

OFFICE OF THE DEPUTY CHIEF OF STAFF  
FOR RESEARCH, DEV, AND ACQUISITION  
DEPARTMENT OF THE ARMY  
ATTN DIRECTOR OF ARMY RESEARCH,  
R. LEWIS  
ATTN DAMA-CSS-N, NUCLEAR TEAM  
ATTN DAMA-ARZ-O, F. D. VERDERAME  
WASHINGTON, DC 20310

ASSISTANT SECRETARY OF THE ARMY (RDA)  
ATTN DEPUTY DIRECTOR FOR  
SCIENCE & TECHNOLOGY  
WASHINGTON, DC 20301

ARMY RESEARCH OFFICE (DURHAM)  
PO BOX 12211  
ATTN H. ROBL  
ATTN R. LONTZ  
ATTN B. D. GUENTHER  
ATTN TECH LIBRARY  
RESEARCH TRIANGLE PARK, NC 27709

COMMANDER  
US ARMY RESEARCH & STD GP (EUR)  
ATTN CHIEF, PHYSICS & MATH BRANCH  
FPO, NEW YORK 09510

NAVAL INTELLIGENCE SUPPORT CENTER  
ATTN M. KOONTZ  
4301 SUITLAND ROAD  
SUITLAND, MD 20390

NAVAL MATERIAL COMMAND  
ATTN T. HORWATCH  
2211 JEFFERSON DAVIS HWY  
WASHINGTON, DC 20301

SUPERINTENDENT  
NAVAL POSTGRADUATE SCHOOL  
ATTN LIBRARY, CODE 2124  
MONTEREY, CA 93940

DIRECTOR  
NAVAL RESEARCH LABORATORY  
ATTN 2600, TECHNICAL INFO DIV  
ATTN 5540, LASER PHYSICS  
ATTN 6000, MATL & RADIATION SCI & TECH  
ATTN B. RIPIN  
ATTN L. A. COSBY  
ATTN E. E. KEMPE  
ATTN J. T. SCHRIEMPF  
ATTN R. F. WENZEL  
ATTN R. HETTICHE  
ATTN J. GOLDEN

NAVAL RESEARCH LABORATORY (Cont'd)  
ATTN V. L. GRANATSTEIN  
ATTN M. A. REED  
ATTN R. K. PARKER  
ATTN P. A. SPRANGLE  
ATTN S. GOLD  
ATTN C. A. KAPETANAKOS  
ATTN S. AHN  
ATTN T. P. COFFEY  
ATTN R. JACKSON  
ATTN I. M. VITKOVITSKY  
ATTN M. FRIEDMAN  
ATTN J. PASOUR  
ATTN G. COOPERSTEIN  
WASHINGTON, DC 20375

OFFICE OF NAVAL RESEARCH  
ATTN C. ROBERSON  
ATTN W. J. CONDELL  
800 N. QUINCY ST  
ARLINGTON, VA 22217

NAVAL SURFACE WEAPONS CENTER  
ATTN V. PUGLIELLI  
ATTN DX-21, LIBRARY DIV  
DAHLGREN, VA 22448

COMMANDER  
NAVAL SURFACE WEAPONS CENTER  
ATTN J. Y. CHOE  
ATTN F. SAZAMA  
ATTN H. UHM  
ATTN V. KENYON  
ATTN E. NOLTING  
ATTN WA-13, HIGH-ENERGY LASER BR  
ATTN WA-50, NUCLEAR WEAPONS EFFECTS DIV  
ATTN WR, RESEARCH & TECH DEPT  
ATTN R-40, RADIATION DIV  
ATTN E-43, TECHNICAL LIBRARY  
WHITE OAK, MD 20910

COMMANDER  
NAVAL WEAPONS CENTER  
ATTN 315, LASER/INFRARED SYS DIV  
ATTN 381, PHYSICS DIV  
CHINA LAKE, CA 93555

ASSISTANT SECRETARY OF THE AIR FORCE  
(RESEARCH & DEVELOPMENT)  
WASHINGTON, DC 20330

DIRECTOR  
AF OFFICE OF SCIENTIFIC RESEARCH  
BOLLING APB  
ATTN NP, DIR OF PHYSICS  
ATTN M. A. STROSCIO  
ATTN R. BARKER  
WASHINGTON, DC 20332

DISTRIBUTION (Cont'd)

HQ, USAF/SAMI  
WASHINGTON, DC 20330

COMMANDER  
AF WEAPONS LAB, AFSC  
ATTN J. GENEROSA  
ATTN A. H. GUNTHER  
ATTN W. E. PAGE  
ATTN LR, LASER DEV DIV  
KIRTLAND AFB, NM 87117

WRIGHT-PATTERSON AFB  
FOREIGN TECHNOLOGY DIVISION/ETD  
ATTN J. BUTLER  
WRIGHT-PATTERSON AFB, OH 45433

CENTRAL INTELLIGENCE AGENCY  
ATTN R. PETTIS  
ATTN D. B. NEWMAN  
PO BOX 1925  
WASHINGTON, DC 20013

DEPARTMENT OF COMMERCE  
NATIONAL BUREAU OF STANDARDS  
ATTN LIBRARY  
ATTN CENTER FOR RADIATION RESEARCH  
ATTN C. TEAGUE  
ATTN E. MARX  
WASHINGTON, DC 20234

DEPARTMENT OF ENERGY  
ATTN O. P. MANLEY  
WASHINGTON, DC 20585

ADMINISTRATOR  
NASA HEADQUARTERS  
WASHINGTON, DC 20546

AMES LABORATORY (ERDA)  
IOWA STATE UNIVERSITY  
ATTN NUCLEAR SCIENCE CATEGORY  
AMES, IA 50011

BOEING AEROSPACE  
ATTN H. T. BUSER  
PO BOX 3999 MS 8R-10  
SEATTLE, WA 98124

BROOKHAVEN NATIONAL LABORATORY  
ASSOCIATED UNIVERSITIES, INC  
ATTN PHYSICS DEPT  
UPTON, LONG ISLAND, NY 11973

UNIVERSITY OF CALIFORNIA  
ELECTRICAL ENGINEERING DEPARTMENT  
ATTN C. K. BIRDSALL  
BERKELEY, CA 94720

UNIVERSITY OF CALIFORNIA  
PHYSICS DEPT.  
ATTN A. N. KAUFMAN  
BERKELEY, CA 94720

UNIVERSITY OF CALIFORNIA, DAVIS  
APPLIED SCIENCES  
ATTN J. DEGROOT  
DAVIS, CA 95616

UNIVERSITY OF CALIFORNIA, IRVINE  
DEPARTMENT OF PHYSICS  
ATTN G. BENFORD  
ATTN N. ROSTOKER  
ATTN M. MAYER  
IRVINE, CA 92717

COLUMBIA UNIVERSITY  
ATTN S. JOHNSTON  
216 MUDD BUILDING  
NEW YORK, NY 10027

CORNELL UNIVERSITY  
ATTN R. LOVELACE  
ATTN R. N. SUDAN  
ATTN J. NATION  
ATTN D. HAMMER  
ATTN H. FLEISHMANN  
ITHACA, NY 14853

DARTMOUTH COLLEGE  
DEPT OF PHYSICS  
ATTN J. E. WALSH  
HANOVER, NH 03755

UNIV OF THE DISTRICT OF COLUMBIA  
MOUNT VERNON CAMPUS  
DEPARTMENT OF PHYSICS  
ATTN A. DONFOR  
1321 H ST, NW  
WASHINGTON, DC 20005

UNIV OF THE DISTRICT OF COLUMBIA  
VAN NESS CAMPUS  
ATTN R. GREEN, PRESIDENT  
4200 CONNECTICUT AVE, NW  
WASHINGTON, DC 20008

UNIV OF THE DISTRICT OF COLUMBIA  
VAN NESS CAMPUS  
DEPARTMENT OF PHYSICS  
ATTN M. J. SMITH (40 COPIES)  
4200 CONNECTICUT AVE, NW  
WASHINGTON, DC 20008

DISTRIBUTION (Cont'd)

UNIV OF THE DISTRICT OF COLUMBIA  
VAN NESS CAMPUS  
COLLEGE OF PHYSICAL SCIENCE  
ENGINEERING & TECHNOLOGY  
ATTN P. BRACH DEAN  
4100 CONNECTICUT AVE, NW  
WASHINGTON, DC 20008

B. K. DYNAMICS  
ATTN R. J. LINZ  
15825 SHADY GROVE RD  
ROCKVILLE, MD 20850

ENGINEERING SOCIETIES LIBRARY  
ATTN ACQUISITIONS DEPARTMENT  
345 EAST 47TH STREET  
NEW YORK, NY 10017

GENERAL DYNAMICS  
ATTN K. H. BROWN  
PO BOX 2507 MS 44-21  
POMONA, CA 91769

IRT CORPORATION  
ATTN F. CHILTON  
PO BOX 85317  
SAN DIEGO, CA 92138

JAYCOR  
ATTN E. CONRAD  
205 S WHITING ST  
ALEXANDRIA, VA 22304

KAMAN SCIENCES CORP  
ATTN T. A. TUMOLILLO  
1500 GARDEN OF THE GODS  
COLORADO SPRINGS, CO 80907

LAWRENCE BERKELEY LAB  
ATTN A. FALTENS  
ATTN A. M. SESSLER  
ATTN D. KEEFE  
BERKELEY, CA 94720

LAWRENCE LIVERMORE LABORATORY  
UNIVERSITY OF CALIFORNIA  
ATTN L. MARTIN  
ATTN P. WHEELER  
ATTN H. S. CABAYAN  
ATTN R. BRIGGS  
ATTN E. K. MILLER  
ATTN R. ZIOLKOWSKI  
ATTN R. SCARPETTI  
ATTN R. MINICH  
ATTN S. BURKHART  
ATTN G. VOGTLIN  
ATTN V. W. SLIVINSKY  
ATTN S. L. YU  
ATTN G. CRAIG  
ATTN R. ALVAREZ

LAWRENCE LIVERMORE LABORATORY (Cont'd)  
ATTN G. LASCHE  
ATTN J. H. YEE  
ATTN H. W. MELDNER  
ATTN J. S. PETTIBONE  
ATTN A. J. POGGIO  
ATTN M. LOYD  
PO BOX 808  
LIVERMORE, CA 94550

CHIEF  
LIVERMORE DIVISION, FIELD COMMAND, DNA  
LAWRENCE LIVERMORE LABORATORY  
PO BOX 808  
LIVERMORE, CA 94550

LOS ALAMOS SCI LAB  
ATTN S. COLGATE  
ATTN D. F. DUBOIS  
ATTN D. FORSLAND  
ATTN C. M. FOWLER  
ATTN B. WARNER  
ATTN J. LANDT  
ATTN R. HOEBERLING  
ATTN T. R. KING  
ATTN A. KADISH  
ATTN K. LEE  
ATTN R. W. FREYMAN  
ATTN L. M. DUNCAN  
ATTN D. B. HENDERSON  
ATTN L. E. THODE  
ATTN H. A. DAVIS  
ATTN T. KWAN  
PO BOX 1663  
LOS ALAMOS, NM 87545

UNIVERSITY OF MARYLAND  
DEPT OF ELECTRICAL ENGINEERING  
ATTN M. REISER  
ATTN W. DESTLER  
ATTN C. D. STRIFFLER  
ATTN M. T. RHEE  
COLLEGE PARK, MD 20742

UNIVERSITY OF MARYLAND  
DEPT OF PHYSICS & ASTRONOMY  
ATTN H. R. GRIEM  
ATTN E. OTT  
ATTN C. GREBOGI  
ATTN K. PAPADOPOULOS  
COLLEGE PARK, MD 20742

MASSACHUSETTS INSTITUTE OF TECHNOLOGY  
PLASMA FUSION CENTER  
ATTN G. BEKEFI  
ATTN B. COPPI  
ATTN R. DAVIDSON  
CAMBRIDGE, MA 02139

DISTRIBUTION (Cont'd)

MAXWELL LABORATORIES  
ATTN J. S. PEARLMAN  
8835 BALBOA AVE  
SAN DIEGO, CA 92123

MISSION RESEARCH CORP  
ATTN B. GODFREY  
ATTN D. J. SULLIVAN  
ATTN M. BOLLEN  
ATTN C. LONGMIRE  
ATTN D. VOSS  
1720 RANDOLPH RD, SE  
ALBUQUERQUE, NM 87106

DIRECTOR  
NASA  
GODDARD SPACE FLIGHT CENTER  
ATTN 250, TECH INFO DIV  
GREENBELT, MD 20771

DIRECTOR  
NATIONAL SECURITY AGENCY  
ATTN TECHNICAL LIBRARY  
ATTN F. BEDARD  
FT MEADE, MD 20755

OAK RIDGE NATIONAL LABORATORY  
PO BOX Y  
ATTN A. C. ENGLAND  
OAK RIDGE, TN 37830

OCCIDENTAL RESEARCH CORP  
ATTN D. B. CHANG  
2100 SE MAIN  
IRVINE, CA 92713

PHYSICS INTERNATIONAL  
ATTN B. A. LIPPMAN  
ATTN R. D. GENUARIO  
2700 MERCER ST  
SAN LEANDRO, CA 94577

SACHS/FREEMAN ASSOC  
ATTN R. A. MAHAFFEY  
19300 GALLANT FOX  
SUITE 214  
BOWIE, MD 20715

SANDIA LABORATORIES  
ATTN R. B. MILLER  
ATTN J. POWELL  
ATTN W. BALLARD  
ATTN C. EKDAHL  
ATTN W. D. BROWN  
ATTN S. HUMPHRIES, JR.  
ATTN G. ROHWEIN  
ATTN K. PRESTWICH  
4244 SANDIA LABS  
ALBUQUERQUE, NM 87115

SCIENCE APPLICATIONS, INC  
ATTN E. P. CORNET  
ATTN A. DROBOT  
ATTN E. KANE  
1710 GOODRIDGE DR  
PO BOX 1303  
MCLEAN, VA 22012

SRI INTERNATIONAL  
ATTN G. AUGUST  
ATTN C. L. RINO  
333 RAVENSWOOD AVE  
MENLO PARK, CA 94025

STANFORD UNIVERSITY  
INSTITUTE PLASMA RESEARCH  
ATTN P. A. STURROCK  
STANFORD, CA 94305

TELEDYNE BROWN ENGINEERING  
CUMMINGS RESEARCH PARK  
ATTN MELVIN L. PRICE, MS-44  
HUNTSVILLE, AL 35807

UNIVERSITY TENNESSEE  
DEPT OF ELECTRICAL ENGINEERING  
ATTN I. ALEXEFF  
ATTN J. R. ROTH  
KNOXVILLE, TN 37916

WESTERN RESEARCH CORP  
ATTN R. O. HUNTER  
225 BROADWAY, SUITE 1600  
SAN DIEGO, CA 92101

US ARMY ELECTRONICS RESEARCH &  
DEVELOPMENT COMMAND  
ATTN COMMANDER, DRDEL-CG  
ATTN TECHNICAL DIRECTOR, DRDEL-CT  
ATTN PUBLIC AFFAIRS OFFICE, DRDEL-IN

HARRY DIAMOND LABORATORIES  
ATTN CO/TD/TSO/DIVISION DIRECTORS  
ATTN RECORD COPY, 81200  
ATTN HDL LIBRARY, 81100 (3 COPIES)  
ATTN HDL LIBRARY, 81100 (WOODBRIDGE)  
ATTN TECHNICAL REPORTS BRANCH, 81300  
ATTN LEGAL OFFICE, 97000  
ATTN CHAIRMAN, EDITORIAL COMMITTEE  
ATTN B. ZABLUDOWSKI, 47400  
ATTN CHIEF 21000  
ATTN CHIEF, 21100  
ATTN CHIEF, 21200  
ATTN CHIEF, 21300  
ATTN CHIEF, 21400  
ATTN CHIEF, 21500  
ATTN CHIEF, 22000  
ATTN CHIEF, 22100  
ATTN CHIEF, 22300  
ATTN CHIEF, 22800

DISTRIBUTION (Cont'd)

HARRY DIAMOND LABORATORIES (Cont'd)

ATTN CHIEF, 22800  
ATTN CHIEF, 22900  
ATTN CHIEF, 20240  
ATTN CHIEF, 11000  
ATTN CHIEF, 13000  
ATTN CHIEF, 13200  
ATTN CHIEF, 13300  
ATTN CHIEF, 15200  
ATTN E. BROWN, 00211  
ATTN H. GERLACH, 11100  
ATTN D. LOKERSON, 11400  
ATTN F. CROWNE, 13200  
ATTN H. DROPKIN, 13200  
ATTN R. LEAVITT, 13200  
ATTN C. MORRISON, 13200  
ATTN J. SATTLER, 13200  
ATTN S. KULPA, 13300  
ATTN J. SILVERSTEIN, 13300  
ATTN C. FAZI, 13500  
ATTN S. LOMONOCO, 15200  
ATTN F. FARRAR, 21100  
ATTN R. GARVER, 21100  
ATTN L. LIBELO, 21100  
ATTN J. TATUM, 21100  
ATTN G. MERKEL, 21300  
ATTN T. OLDHAM, 22300  
ATTN B. MCLEAN, 22300  
ATTN J. BLACKBURN, 22800  
ATTN R. GILBERT, 22800  
ATTN J. VANDERWALL, 22800  
ATTN H. E. BRANDT, 22900 (25 COPIES)  
ATTN A. BROMBORSKY, 22900  
ATTN S. GRAYBILL, 22900  
ATTN G. A. HUTTLIN, 22900  
ATTN A. KEHS, 22900  
ATTN K. KERRIS, 22900  
ATTN A. STEWART, 22900  
ATTN J. SOLN, 22900



**DATE**  
**ILME**